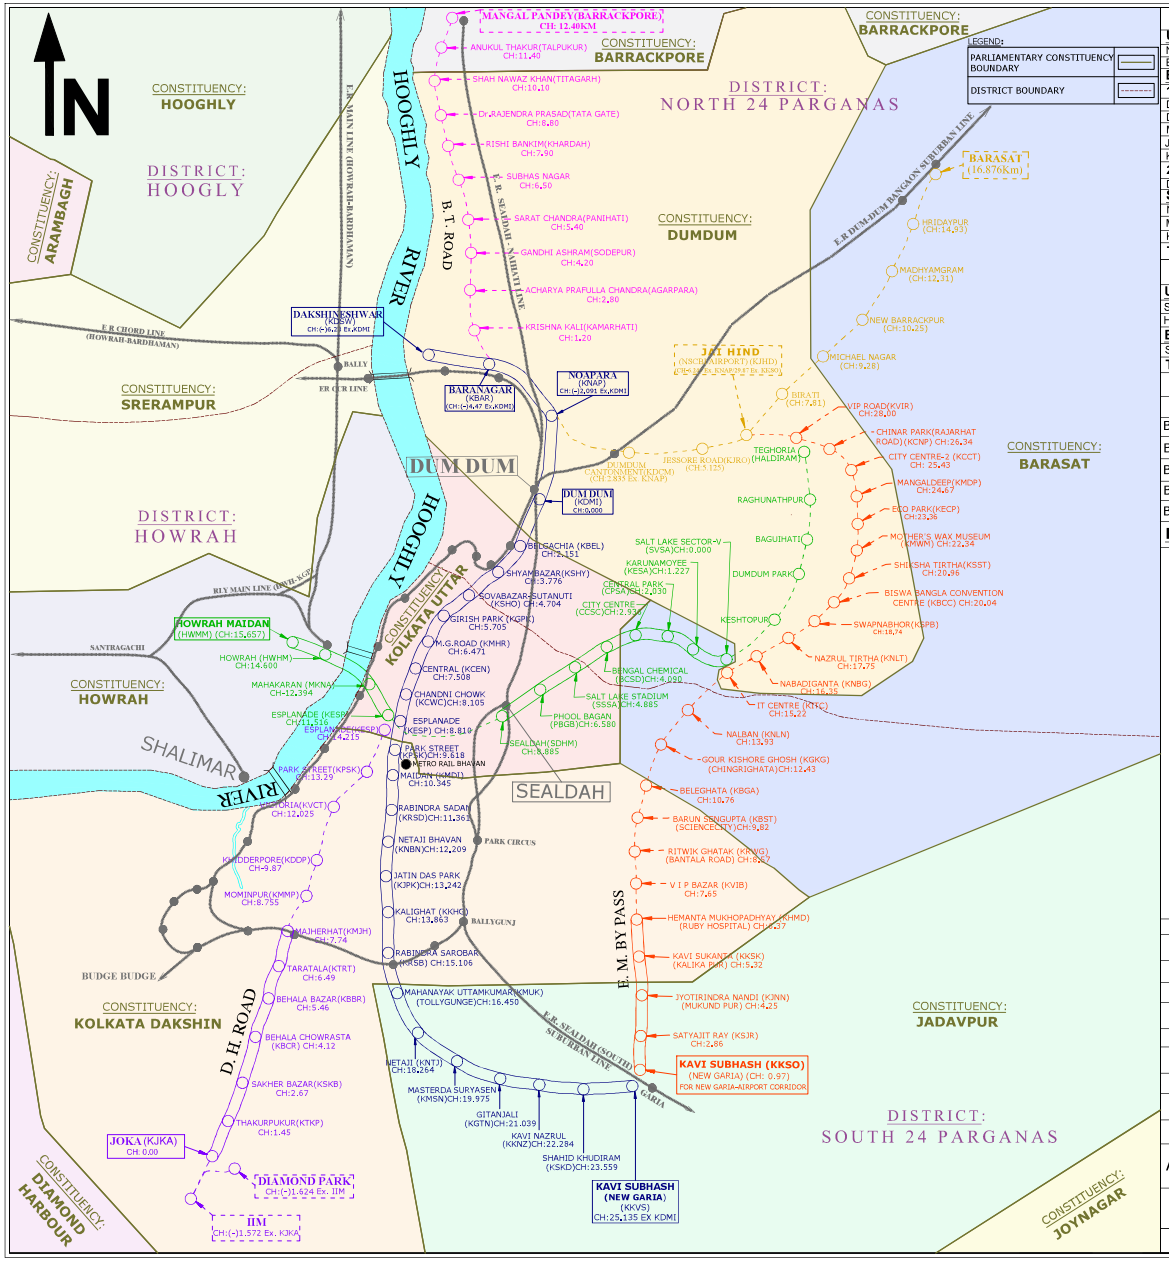


B.G SECTION (OPERATIONAL)

UNDER GROUND	
NOAPARA - DUMDUM	0.426 Km
BELGACHIA- MAHANAYAK UTTAM KUMAR	14.994 Km
ELEVATED:	
1. VIADUCT	
DAKSHINESWAR (upto Buffer) - DUMDUM	3.696 Km
DUMDUM - BELGACHIA	1.200 Km
MAHANAYAK UTTAM KUMAR - KAVI SUBHASH	7.736 Km
JOKA - MAJERHAT (upto Buffer)	7.740 Km
KAVI SUBHASH-HEMANTA MUKHOPADHYAY (upto Buffer)	5.400 Km
2. EMBANKMENT	
DAKSHINESWAR - NOAPARA	1.546 Km
SURFACE:	
NOAPARA - DUMDUM	0.764 Km
MAHANAYAK UTTAM KUMAR STATION	0.870 Km
KAVI SUBHASH STATION (upto Buffer)	0.898 Km
TOTAL	45.270 Km

S.G SECTION (OPERATIONAL)

UNDER GROUND	
SALT LAKE STADIUM - SEALDAH (upto Buffer)	3.220 Km
HOWRAH MAIDAN - ESPLANADE (upto Buffer)	4.800 Km
ELEVATED	
SALT LAKE SECTOR V - SALT LAKE STADIUM	6.080 Km
TOTAL	14.100 Km

METRO RAILWAY KOLKATA

SYSTEM MAP

PARLIAMENTARY CONSITUENCY WISE

(AS ON 31.03.2025)

NUMBER OF STATIONS IN OPERATION

SECTION	UNDER GROUND	ELEVATED	SURFACE	TOTAL
BETWEEN DAKSHINESWAR - KAVI SUBHASH	15	9	2	26
BETWEEN SALT LAKE SECTOR V - SEALDAH	2	6	0	8
BETWEEN HOWRAH MAIDAN - ESPLANADE	4	0	0	4
BETWEEN JOKA - MAJERHAT	0	7	0	7
BETWEEN KAVI SUBHASH-HEMANTA MUKHOPADHYAY	0	5	0	5

LEGEND:

A. BLUE LINE [DAKSHINESWAR - KAVI SUBHASH] BY METRO RAILWAY (COMMISSIONED) (32.13 KM)

B. YELLOW LINE [NOAPARA - BARASAT] BY METRO RAILWAY (UNDER CONSTRUCTION) (18.13 KM)

C. PINK LINE [BARANAGAR - BARRACKPUR] BY RVNL (PROJECT ANNOUNCED) (12.50 KM)

D. ORANGE LINE [KAVI SUBHASH(NEW GARIA) - JAI HIND(AIRPORT)] BY RVNL (32.07 KM)
- i. KAVI SUBHASH - HEMANTA MUKHOPADHYAY (COMMISSIONED) (5.40 KM)
- ii. HEMANTA MUKHOPADHYAY - JAI HIND (AIRPORT) (UNDER CONSTRUCTION) (26.67 KM)

E. PURPLE LINE [ESPLANADE - JOKA - IIM - DIAMOND PARK] BY RVNL (18.84 KM)
- i. JOKA - MAJERHAT (COMMISSIONED)(07.74 KM)
- ii. MAJERHAT - ESPLANADE (UNDER CONSTRUCTION)(07.47 KM)
- iii. JOKA - DIAMOND PARK (PROJECT ANNOUNCED)(03.63 KM)

F. GREEN LINE [HOWRAH MAIDAN - SALT LAKE SECTOR-V - TEGHORIA] BY KMRCL (23.20KM)
- i. SALT LAKE SECTOR V - SEALDAH (COMMISSIONED)(9.30KM)
- ii. ESPLANADE - HOWRAH MAIDAN (COMMISSIONED) (4.80KM)
- iii. SEALDAH - ESPLANADE (UNDER CONSTRUCTION) (2.45KM)
- iv. SALT LAKE SECTOR V - TAGHORIA (PROJECT ANNOUNCED) (6.65KM)

G. EXISTING EASTERN RAILWAY & SOUTH EASTERN RAILWAY LINE AND STATIONS

H. RAILWAY HEAD QUARTER

ART LOCATION	ART
BLUE LINE	
NOAPARA	1
KAVI SUBHASH	1
PURPLE LINE	
JOKA	1
ORANGE LINE	
KAVI SUBHASH	1
GREEN LINE	
CENTRAL PARK DEPOT	1

TRACK KILOMETERS

BG 1676 MM

SECTION	ROUTE KM	TRACK KM	ETKM
DAKSHINESWAR-KAVI SUBHASH	32.13 (upto buffer ends)	110.85 (including yards)	157.76 (including yards)
SECTION	**ROUTE KM**	**TRACK KM**	**ETKM**
JOKA- MAJERHAT	7.74 (upto buffer ends)	31.07 (including yard)	43.19 (including yard)
SECTION	**ROUTE KM**	**TRACK KM**	**ETKM**
KAVI SUBHASH - HEMANTA MUKHOPADHYAY	5.40 (upto buffer ends)	17.41 (including yard)	25.35 (including yard)

CORRECTED UPTO 31ST MARCH, 2025

SG 1435 MM

SECTION	ROUTE KM	TRACK KM	ET KM
SALT LAKE SECTOR-V -SEALDAH	9.30 (upto buffer ends)	32.21 (including yard)	46.73 (including yard)
HOWRAH MAIDAN -ESPLANADE	4.80 (upto buffer ends)	11.00 (including yard)	14.23 (including yard)

SCALE: NOT TO SCALE

AJAY KUMAR Digitally signed by AJAY KUMAR Date: 2025.08.04 14:49:47 +05'30'	SUNIL KUMAR DUBEY Digitally signed by SUNIL KUMAR DUBEY Date: 2025.08.01 15:40:30 +05'30'	DEBABRATA GHOSH Digitally signed by DEBABRATA GHOSH Date: 2025.08.01 11:12:35 +05'30'
[AJAY KUMAR] Chief Engineer/O&M	[S. K. DUBEY] Deputy Chief Engineer/HQ	[D. GHOSH] Asst. Executive Engineer/Plg & HQ

METRO RAILWAY DRAWING NO : MRC/W/SYSTEM MAP (CONSTITUENCY WISE)/MARCH/2025